




3.0SMC Series 3000W Transient Voltage Suppressor

Rev.3.1

DESCRIPTION:

TVS diodes can be used in a wide range of applications which like consumer electronic products, automotive industries, munitions, telecommunications, aerospace industries, and intelligent control systems.



SMC

FEATURES:

- ✧ Low profile package.
- ✧ Low inductance.
- ✧ Excellent clamping capability.
- ✧ 3000W peak pulse power capability at 10/1000 μ s waveform.
- ✧ Typical I_R less than 1 μ A above 12V.
- ✧ Fast response time: typically less than 1.0ps from 0V to V_{BR} min.
- ✧ High temperature to reflow soldering: 260 $^{\circ}$ C/40s at terminals.
- ✧ Plastic package has underwriters laboratory flammability 94V-0.
- ✧ Meets MSL level 1, per J-STD-020, LF maximum peak of 260 $^{\circ}$ C.
- ✧ Terminal: solder plated, solderable per J-STD-002.
- ✧ For surface mounted applications in order to optimize board space



Bi-directional



Uni-directional

Symbol


ABSOLUTE MAXIMUM RATINGS ($T_A=25^{\circ}$ C, RH=45%-75%, unless otherwise noted)

Parameter	Symbol	Value	Unit
Storage and operating junction temperature range	T_{STG}/T_J	-55 to +150	$^{\circ}$ C
Peak pulse power dissipation at 10/1000 μ s waveform	P_{PP}	3000	W
Steady state power dissipation at $T_L=75^{\circ}$ C	$P_{M(AV)}$	6.5	W
Maximum instantaneous forward voltage at 80A for unidirectional	V_F	5.0	V
Peak forward surge current, 8.3ms single half sine wave(Note 1)	I_{FSM}	300	A
Typical thermal resistance junction to lead	$R_{\theta JL}$	15	$^{\circ}$ C/W
Typical thermal resistance junction to ambient	$R_{\theta JA}$	75	$^{\circ}$ C/W

Notes:

1. Measured on 8.3ms single half sine wave or equivalent square wave for unidirectional device only, duty cycle=4 per minute maximum

MARKING



C6V8 : Device Marking Code
1409: In ninth week, 2014

ELECTRICAL CHARACTERISTICS (T_A=25°C)

Part Number		Marking		V _R	I _R @ V _R	V _{BR} @I _T		I _T	V _C @ I _{PP}	I _{PP} ^①
Uni-polar	Bi-polar	Uni	Bi	(V)	μA	min(V)	max(V)	mA	V	A
3.0SMC6.8A	3.0SMC6.8CA	A6V8	C6V8	5.8	800	6.45	7.14	10	10.5	285.7
3.0SMC7.5A	3.0SMC7.5CA	A7V5	C7V5	6.4	500	7.13	7.88	10	11.3	265.5
3.0SMC8.2A	3.0SMC8.2CA	A8V2	C8V2	7.02	200	7.79	8.61	10	12.1	247.9
3.0SMC9.1A	3.0SMC9.1CA	A9V1	C9V1	7.78	100	8.65	9.55	1	13.4	223.9
3.0SMC10A	3.0SMC10CA	A10	C10	8.55	50	9.50	10.50	1	14.5	206.9
3.0SMC11A	3.0SMC11CA	A11	C11	9.4	20	10.50	11.60	1	15.6	192.3
3.0SMC12A	3.0SMC12CA	A12	C12	10.2	10	11.40	12.60	1	16.7	179.6
3.0SMC13A	3.0SMC13CA	A13	C13	11.1	1	12.40	13.70	1	18.2	164.8
3.0SMC15A	3.0SMC15CA	A15	C15	12.8	1	14.30	15.80	1	21.2	141.5
3.0SMC16A	3.0SMC16CA	A16	C16	13.6	1	15.20	16.80	1	22.5	133.3
3.0SMC18A	3.0SMC18CA	A18	C18	15.3	1	17.10	18.90	1	25.2	119.0
3.0SMC20A	3.0SMC20CA	A20	C20	17.1	1	19.00	21.00	1	27.7	108.3
3.0SMC22A	3.0SMC22CA	A22	C22	18.8	1	20.90	23.10	1	30.6	98.0
3.0SMC24A	3.0SMC24CA	A24	C24	20.5	1	22.80	25.20	1	33.2	90.4
3.0SMC27A	3.0SMC27CA	A27	C27	23.1	1	25.70	28.40	1	37.5	80.0
3.0SMC30A	3.0SMC30CA	A30	C30	25.6	1	28.50	31.50	1	41.4	72.5
3.0SMC33A	3.0SMC33CA	A33	C33	28.2	1	31.40	34.70	1	45.7	65.6
3.0SMC36A	3.0SMC36CA	A36	C36	30.8	1	34.20	37.80	1	49.9	60.1
3.0SMC39A	3.0SMC39CA	A39	C39	33.3	1	37.10	41.00	1	53.9	55.7
3.0SMC43A	3.0SMC43CA	A43	C43	36.8	1	40.90	45.20	1	59.3	50.6
3.0SMC47A	3.0SMC47CA	A47	C47	40.2	1	44.70	49.40	1	64.8	46.3
3.0SMC51A	3.0SMC51CA	A51	C51	43.6	1	48.50	53.60	1	70.1	42.8
3.0SMC56A	3.0SMC56CA	A56	C56	47.8	1	53.20	58.80	1	77.0	39.0

ELECTRICAL CHARACTERISTICS ($T_A=25^{\circ}\text{C}$, continued)

Part Number		Marking		V_R	$I_R@V_R$	$V_{BR}@I_T$		I_T	$V_C@I_{PP}$	$I_{PP}^{①}$
Uni-Polar	Bi-Polar	Uni	Bi	V	μA	min(V)	max(V)	mA	V	A
3.0SMC62A	3.0SMC62CA	A62	C62	53.0	1	58.90	65.10	1	85.0	35.3
3.0SMC68A	3.0SMC68CA	A68	C68	58.1	1	64.60	71.40	1	92.0	32.6
3.0SMC75A	3.0SMC75CA	A75	C75	64.1	1	71.30	78.80	1	103.0	29.1
3.0SMC82A	3.0SMC82CA	A82	C82	70.1	1	77.90	86.10	1	113.0	26.5
3.0SMC91A	3.0SMC91CA	A91	C91	77.8	1	86.50	95.50	1	125.0	24.0
3.0SMC100A	3.0SMC100CA	A100	C100	85.5	1	95.00	105.0	1	137.0	21.9
3.0SMC110A	3.0SMC110CA	A110	C110	94.0	1	105.0	116.0	1	152.0	19.7
3.0SMC120A	3.0SMC120CA	A120	C120	102	1	114.0	126.0	1	165.0	18.2
3.0SMC130A	3.0SMC130CA	A130	C130	111	1	124.0	137.0	1	179.0	16.8
3.0SMC150A	3.0SMC150CA	A150	C150	128	1	143.0	158.0	1	207.0	14.5
3.0SMC160A	3.0SMC160CA	A160	C160	136	1	152.0	168.0	1	219.0	13.7
3.0SMC170A	3.0SMC170CA	A170	C170	145	1	162.0	179.0	1	234.0	12.8
3.0SMC180A	3.0SMC180CA	A180	C180	154	1	171.0	189.0	1	246.0	12.2
3.0SMC200A	3.0SMC200CA	A200	C200	171	1	190.0	210.0	1	274.0	10.9
3.0SMC220A	3.0SMC220CA	A220	C220	185	1	209.0	231.0	1	328.0	9.1
3.0SMC250A	3.0SMC250CA	A250	C250	214	1	237.0	263.0	1	344.0	8.8
3.0SMC300A	3.0SMC300CA	A300	C300	256	1	285.0	315.0	1	414.0	7.3
3.0SMC350A	3.0SMC350CA	A350	C350	300	1	332.0	368.0	1	482.0	6.2
3.0SMC400A	3.0SMC400CA	A400	C400	342	1	380.0	420.0	1	548.0	5.5
3.0SMC440A	3.0SMC440CA	A440	C440	376	1	418.0	462.0	1	602.0	5.0

① Surge waveform: 10/1000 μs V_R : Stand-off voltage -- Maximum voltage that can be applied V_{BR} : Breakdown voltage V_C : Clamping voltage -- Peak voltage measured across the suppressor at a specified I_{PP} I_R : Reverse leakage current

ORDERING INFORMATION

3.0SMC 3000W SMC Series	XX V_{BR} Voltage	C C: Bi-directional	A 5% V_{BR} Voltage tolerance
--	---	--	---

RATINGS AND V-I CHARACTERISTICS CURVES ($T_A=25^{\circ}\text{C}$, unless otherwise noted)

FIG.1:V- I curve characteristics (Uni-directional)

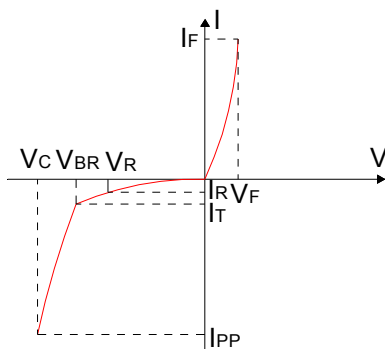


FIG.2:V- I curve characteristics (Bi-directional)

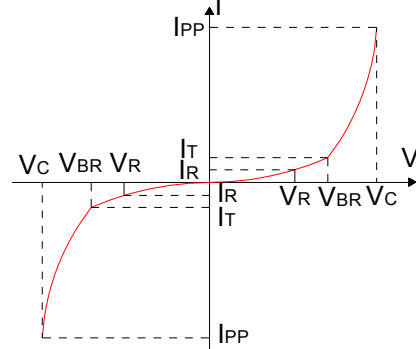


FIG.3: Pulse waveform

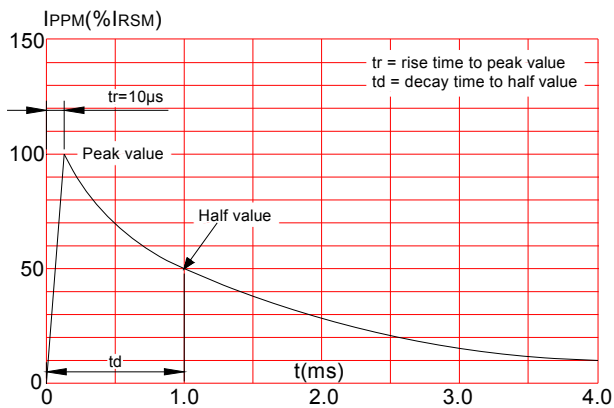


FIG.4: Pulse derating curve



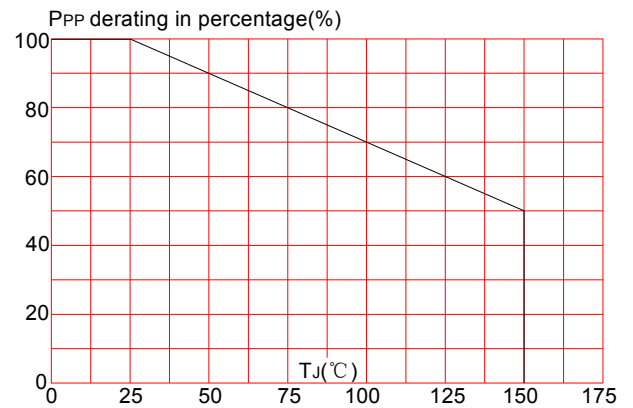


FIG.5:Peak pulse power dissipation vs. pulse width

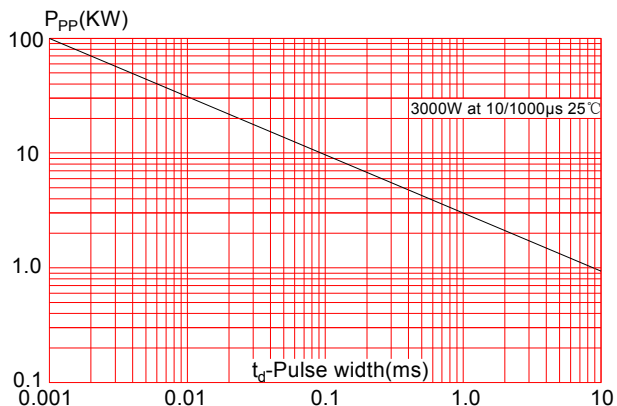


SOLDERING PARAMETERS

Reflow Condition		Pb-Free assembly (see figure at right)
Pre Heat	-Temperature Min ($T_{s(min)}$)	+150°C
	-Temperature Max($T_{s(max)}$)	+200°C
	-Time (Min to Max) (ts)	60-180 secs.
Average ramp up rate (Liquidus Temp (T_L) to peak)		3°C/sec. Max
$T_{s(max)}$ to T_L - Ramp-up Rate		3°C/sec. Max
Reflow	-Temperature(T_L)(Liquidus)	+217°C
	-Temperature(t_L)	60-150 secs.
Peak Temp (T_P)		+260(+0/-5)°C
Time within 5°C of actual Peak Temp (t_p)		20-40secs.
Ramp-down Rate		6°C/sec. Max
Time 25°C to Peak Temp (T_P)		8 min. Max
Do not exceed		+260°C

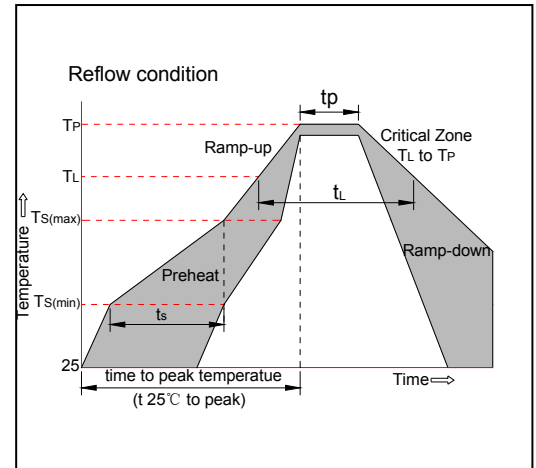


PACKAGE MECHANICAL DATA

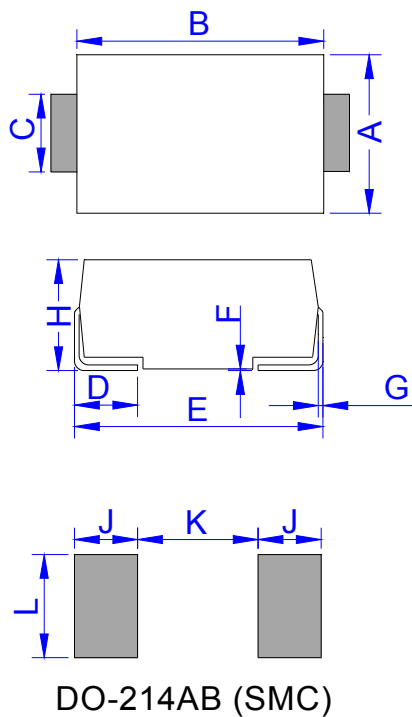

Ref.	Dimensions			
	Millimeters		Inches	
	Min.	Max.	Min.	Max.
A	5.75	6.25	0.226	0.246
B	6.90	7.40	0.272	0.291
C	2.75	3.25	0.108	0.128
D	0.95	1.52	0.037	0.060
E	7.70	8.20	0.303	0.323
F	0.051	0.203	0.002	0.008
G	0.15	0.31	0.006	0.012
H	2.15	2.62	0.085	0.103
J	2.40		0.094	
K		4.20		0.165
L	3.30		0.130	

TAPE AND REEL SPECIFICATION-SMC

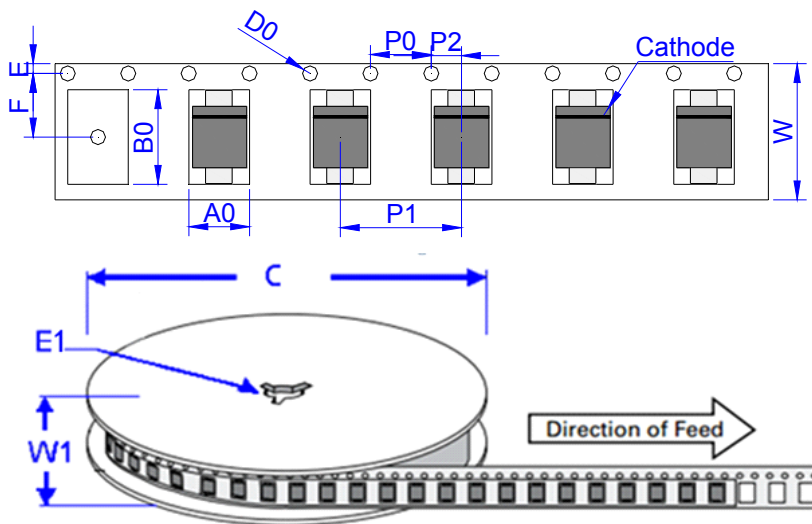

Ref.	Dimensions	
	Millimeters	Inches
A0	6.05 ± 0.3	0.238 ± 0.012
B0	8.31 ± 0.3	0.327 ± 0.012
C	330.0	13.0
D0	1.55 ± 0.1	0.061 ± 0.004
E	1.75 ± 0.2	0.069 ± 0.008
E1	13.3 ± 0.3	0.524 ± 0.012
F	7.50 ± 0.2	0.295 ± 0.008
P0	4.00 ± 0.2	0.157 ± 0.008
P1	8.00 ± 0.2	0.3145 ± 0.008
P2	2.00 ± 0.2	0.079 ± 0.008
W	16.0 ± 0.2	0.630 ± 0.008
W1	19.7 ± 2.0	0.776 ± 0.079

PART No.	UNIT WEIGHT (g/PCS) typ.	REEL (PCS)	PER CARTON (PCS)	DESCRIPTION
3.0SMCxxA/CA	0.262	3,000	48,000	13 inch reel pack

Information furnished in this document is believed to be accurate and reliable. However, Jiangsu JieJie Microelectronics Co.,Ltd assumes no responsibility for the consequences of use without consideration for such information nor use beyond it.

Information mentioned in this document is subject to change without notice, apart from that when an agreement is signed, Jiangsu JieJie complies with the agreement.

Products and information provided in this document have no infringement of patents. Jiangsu JieJie assumes no responsibility for any infringement of other rights of third parties which may result from the use of such products and information.

This document is the 3.1st version which is made in 19-Feb.-2020. This document supersedes and replaces all information previously supplied.



is a registered trademark of Jiangsu JieJie Microelectronics Co.,Ltd.

Copyright©2020 Jiangsu JieJie Microelectronics Co.,Ltd. Printed All rights reserved.